

Assemble your

SPIDER-MAN

Version **IRON SPIDER**

MARVEL STUDIOS

THE
INFINITY
SAGA



03

**PREMIUM
BASE
ASSEMBLY
GUIDE**

All images of the model are of the prototype and not from the motion picture movie.



F244.INS503



FANHOME



DeAgostini
COLLECTIBLES

MARVEL STUDIOS

© 2026 MARVEL

OUTER SECTIONS (3)

The assembly of the premium base for the Spider-Man Iron Spider armor continues with the third section for the outer edge of the base.

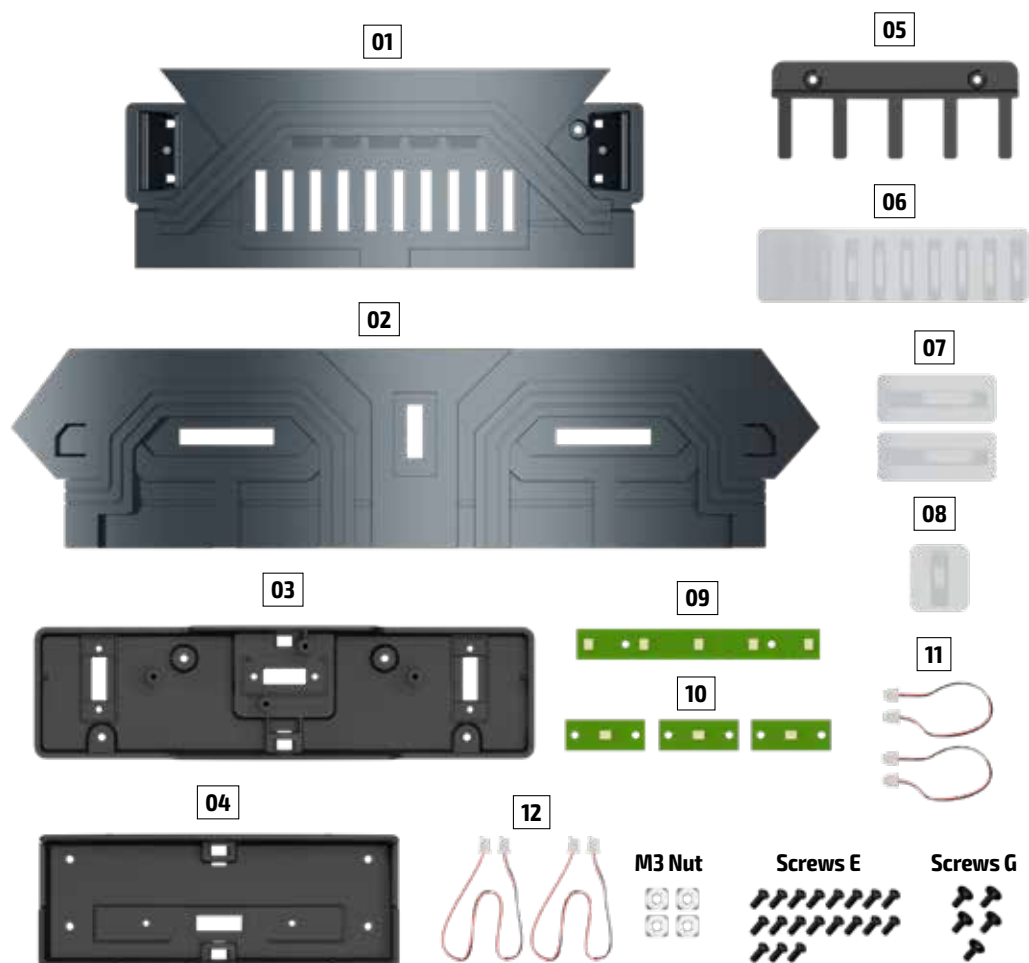


NOTE: The appearance of the parts shown here may be slightly different from the parts delivered with the issue.

Parts with this issue

01 Side panel with LED grille
02 Side panel with three LEDs
03 Internal structure (2)
04 Internal structure (1)
05 Fixture for curved LED screen
06 Curved LED screen

07 Side LED screen x 2
08 Center LED screen
09 LED strip
10 LED circuit board x 3
11 Short cables x 2
12 Long cables x 2

M3 nuts x 4
Screws E 18 + 1
Screws G 4 + 1

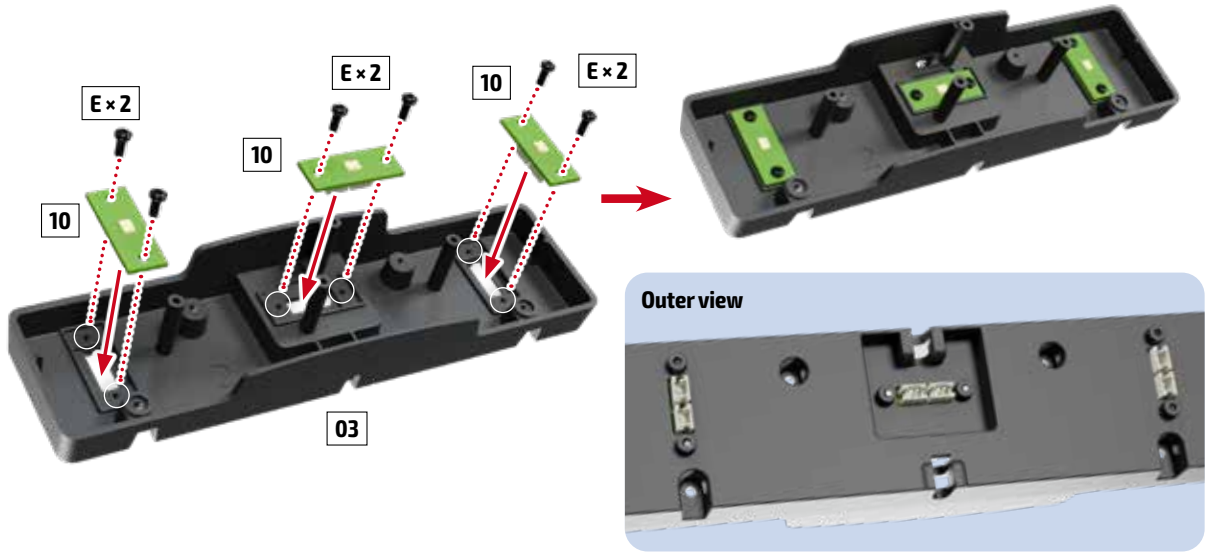


STEP 1

Inside internal structure **03** (marked 2), position and fix three LED circuit boards **10** with two type E screws each. Note: the white LEDs on each circuit board face upward.



STEP 2


In the slots on either side of the center LED, insert two M3 nuts. Insert the nuts sideways and push them with the tip of a screwdriver so that they fit tightly. They will be visible from the side hole.

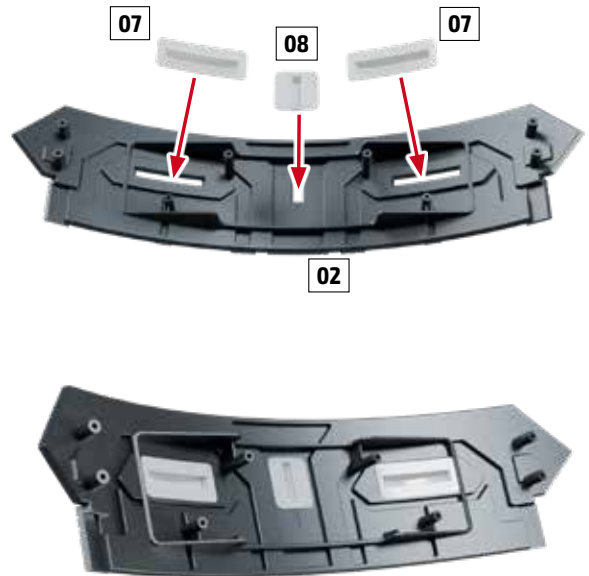

STEP 3


Inside the side panel **02** (marked 1), position and fit the center LED screen **08** and the two side LED screens **07** (the two screens are identical), in the location shown.

PREMIUM BASE MOUNTING GUIDE 3

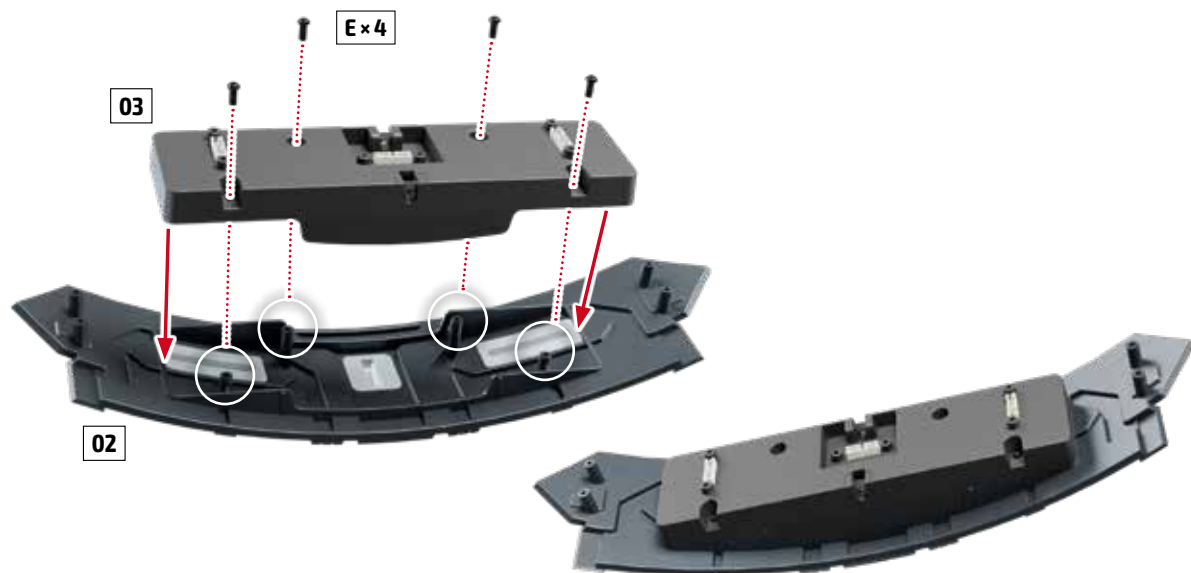


STEP 4

Being careful that the M3 nuts and screens are not dislodged, on the inside of side panel **02** (marked 1) position and fit the internal structure **03** as shown. Secure it with four type E screws.

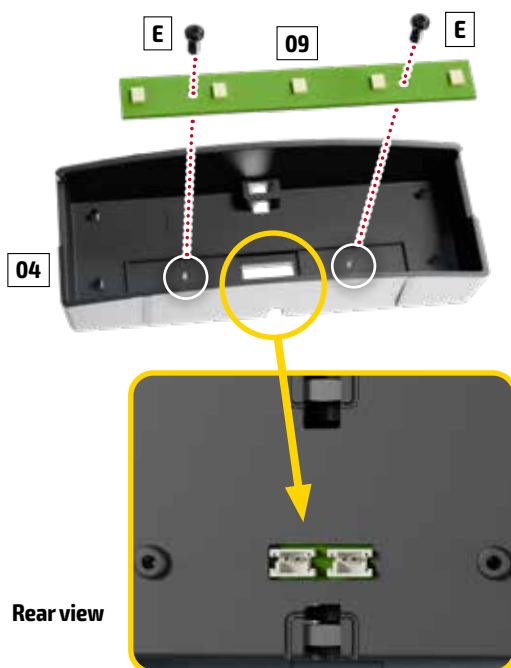


STEP 5

Inside internal structure **04** (marked 1), fix the LED strip **09** with two type E screws. Note: the LEDs on the strip face upward.

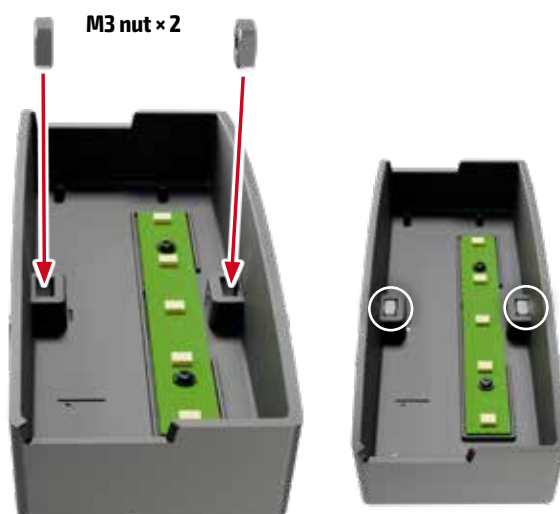


STEP 6

In the slots on either side of the LED strip, insert a pair of M3 nuts. Insert the nuts sideways and push them a little with the tip of a screwdriver so that they fit tightly.

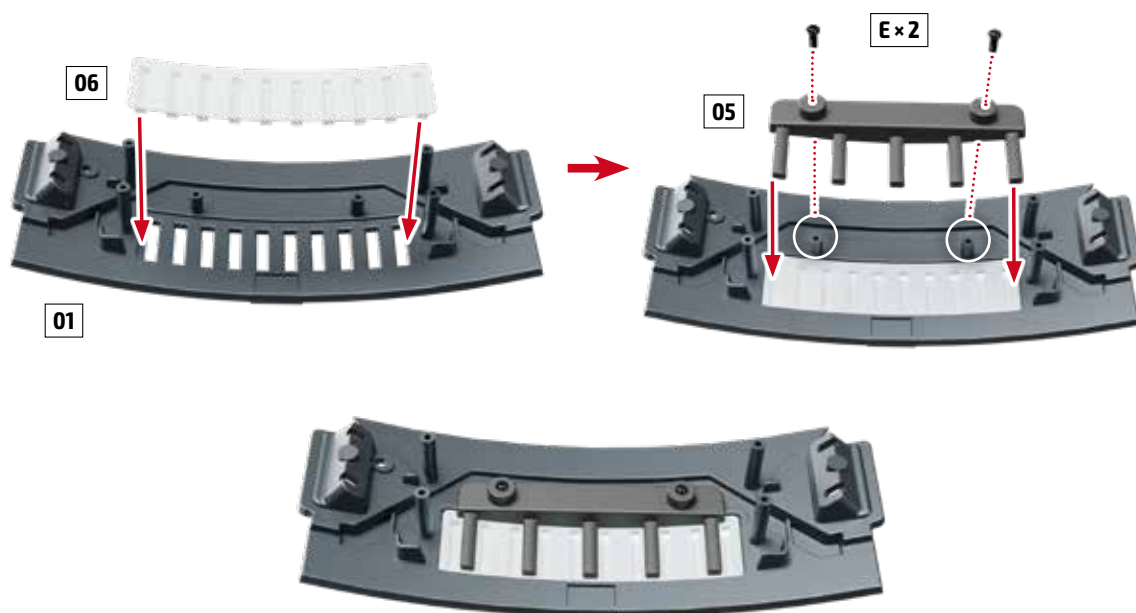

STEP 7

On the inside of the side panel with LED grille 01, insert curved screen 06. Next, over screen 06, place the fixture for the LED screen 05 and secure with two type E screws.

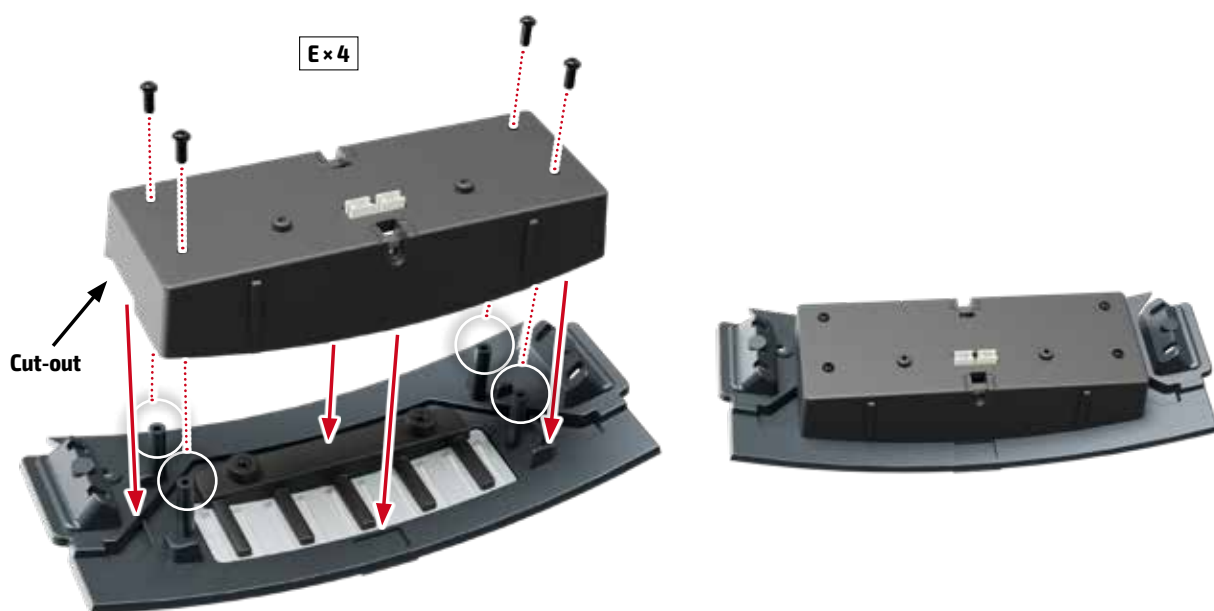


STEP 8

On the inside of side panel 01, working carefully so that the nuts do not fall out, position and fit internal structure 04 as shown. It will only fit correctly in one position. Fix it in position with four type E screws.

PREMIUM BASE MOUNTING GUIDE 3

STEP 8

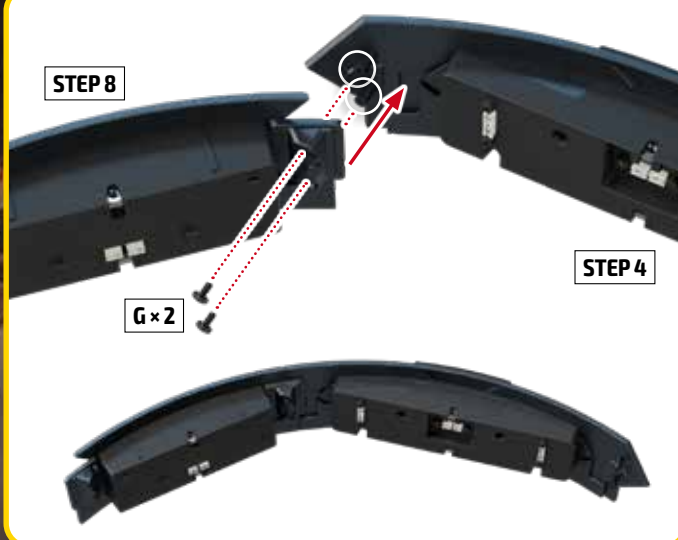


STEP 9

With the internal structures in place, position and fit the two side sections by fitting the pins of panel 02 into the holes in the side of 01. Fix the parts together with two type G screws.

STEP 10

Plug either of the short cables 11 (they are identical) into the connectors shown on the internal structure 03. Next, plug the other cable 11 into the two connectors on the internal structure 03.

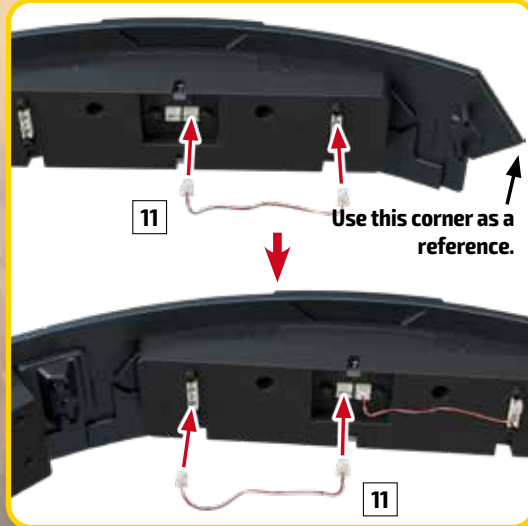

STEP 11

Then plug one of the long cables 12 into the two connectors shown on the internal structures 03 and 04.



STEP 12

Join the issue 3 assembly to the assemblies from issues 1 and 2. Insert the pins on the end of the issue 3 assembly into the holes in the edge of the issue 1 assembly. Fix the parts together with two type G screws.

Issue 1

Issue 3


Work on a table to keep the sections in position.

Issue 2

Issue 1

Issue 3

G x 2

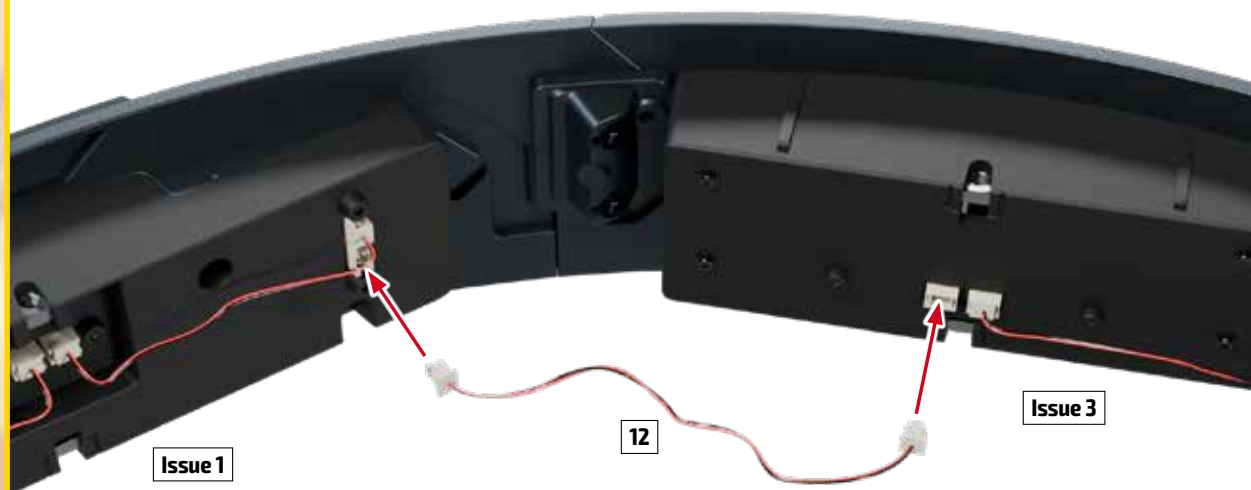

STEP 13

Finally, plug in the remaining long cable 12 as shown, connecting the issue 3 assembly to the outer edge of the base.

RESULT



The third section is now attached to the outer edge. Keep the assembled base safe from knocks and scratches.

